

# 10/100/1000 Base-T DIP Transformer

Part Number: 96131DG

Page: 1/2

- Compliant with IEEE 802.3 standard.
- RoHS compliant.
- Power over Ethernet(PoE) Magnetics,30W@57V.
- Operating temperature range: -40°C to +85°C.
- Storage temperature range:-20°C to +125°C


### Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)		OCL(uH Min) @100KHz/0.1V with 8.0mA DC	Insertion Loss (dB Max) 1-100MHz	DCMR (dB Min) 1-100MHz	HI-POT (Vrms) 1500
	TX	RX				
96131DG	1CT:1CT	1CT:1CT	350	-1.1	-30	1500

### Continue

Part Number	Return Loss (dB Min)					Cross Talk (dB Min)		
	1-30MHz	40MHz	50MHz	60-80MHz	100MHz	30MHz	60MHz	100MHz
96131DG	-18	-14.4	-13.1	-12	-10	-40	-35	-30

### Schematics:

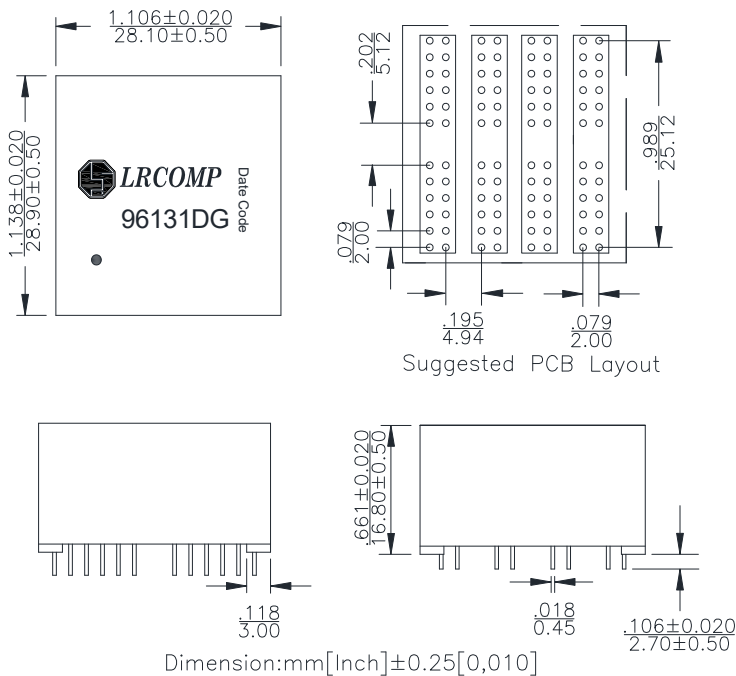

### PIN Describing


91	85	79	73	67	61	55	49
92	86	80	74	68	62	56	50
93	87	81	75	69	63	57	51
94	88	82	76	70	64	58	52
95	89	83	77	71	65	59	53
96	90	84	78	72	66	60	54
6	12	18	24	30	36	42	48
5	11	17	23	29	35	41	47
4	10	16	22	28	34	40	46
3	9	15	21	27	33	39	45
2	8	14	20	26	32	38	44
1	7	13	19	25	31	37	43

# 10/100/1000 Base-T DIP Transformer



Part Number: 96131DG

Page: 2/2

**Schematics:**

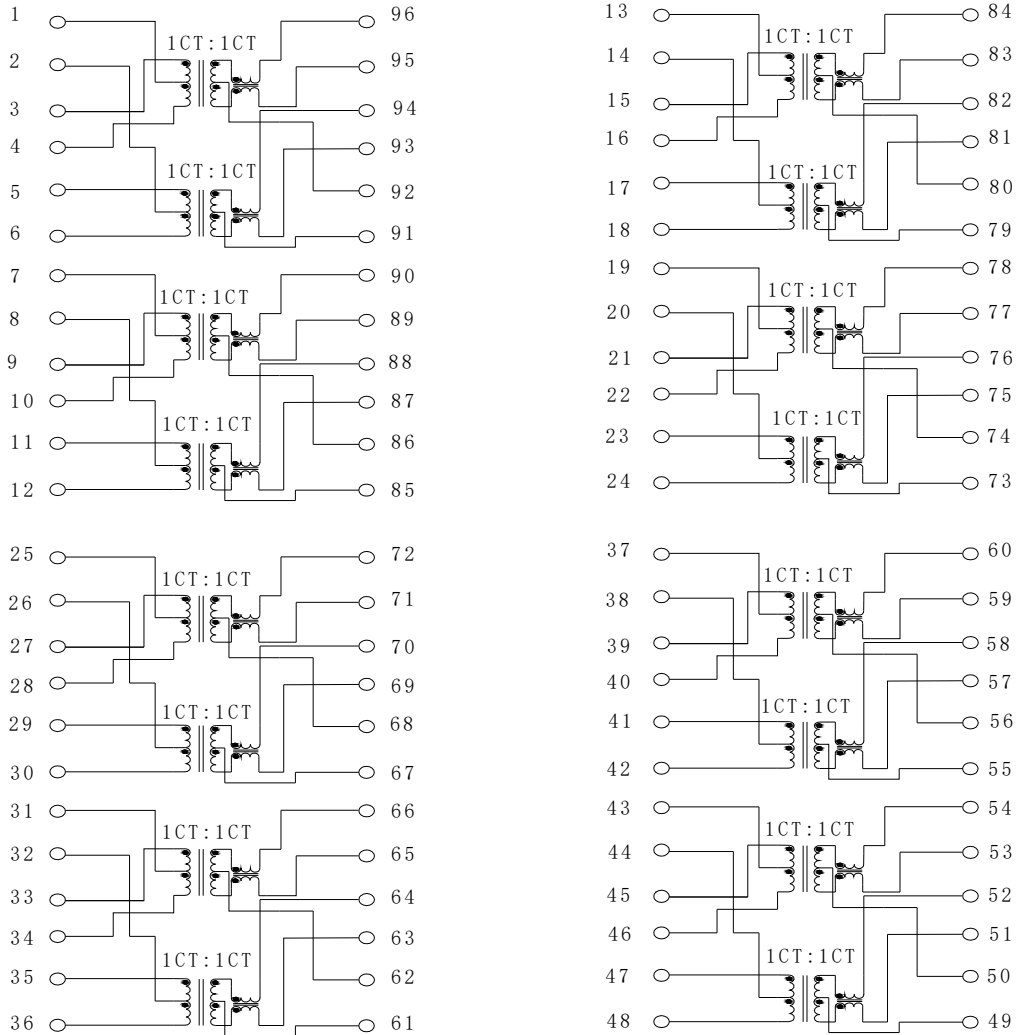

**Package:**

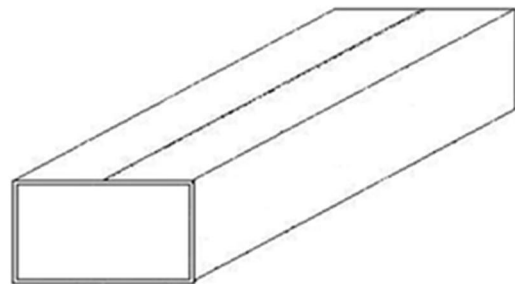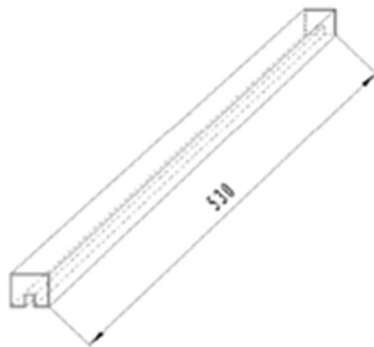

Quantity per reel: 17 pcs

Quantity per big carton: 816 pcs